



4" UP SERIES SUBMERSIBLE PUMPS 3450 RPM 60 Hz

UP Series Submersible Pumps are manufactured using high quality materials and are designed to deliver years of dependable service. The **UP Series** is comprised of a large selection of pump models ranging from 1/2 HP through 10 HP with a broad variety of capacities (5 gpm - 80 gpm).

Pumps are equipped with floating impellers to reduce the high starting torque. Impellers are made of abrasion resistant Noryl*, with polycarbonate diffusers. Both are encased in a stainless steel bowl. All materials used are highly resistant to corrosion and abrasion.

QUALITY FEATURES

CAST STAINLESS STEEL DISCHARGE
HEAD WITH BUILT-IN CHECK VALVE

CAST STAINLESS STEEL
MOTOR ADAPTER

STAINLESS STEEL PUMP CASING

STAINLESS STEEL BOWLS

STAINLESS STEEL STRAINER

STAINLESS STEEL
PUMP SHAFT & COUPLING

STAINLESS STEEL CABLE GUARD

IMPELLERS, DIFFUSERS & BEARINGS
ARE CONSTRUCTED OF ENGINEERING
COMPOSITES THAT ARE NON-TOXIC
AND ARE RESISTANT TO CORROSION
AND ABRASION

DURABLE URETHANE BEARINGS



* GE Trade Mark

Specifications subject to change without notice.

DISTRIBUTED BY:




4" MODEL UP-05
60 Hz - 3450 RPM



1 1/4" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
5 GPM MAXIMUM EFFICIENCY

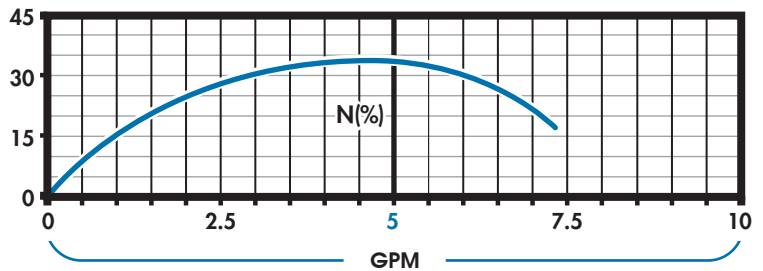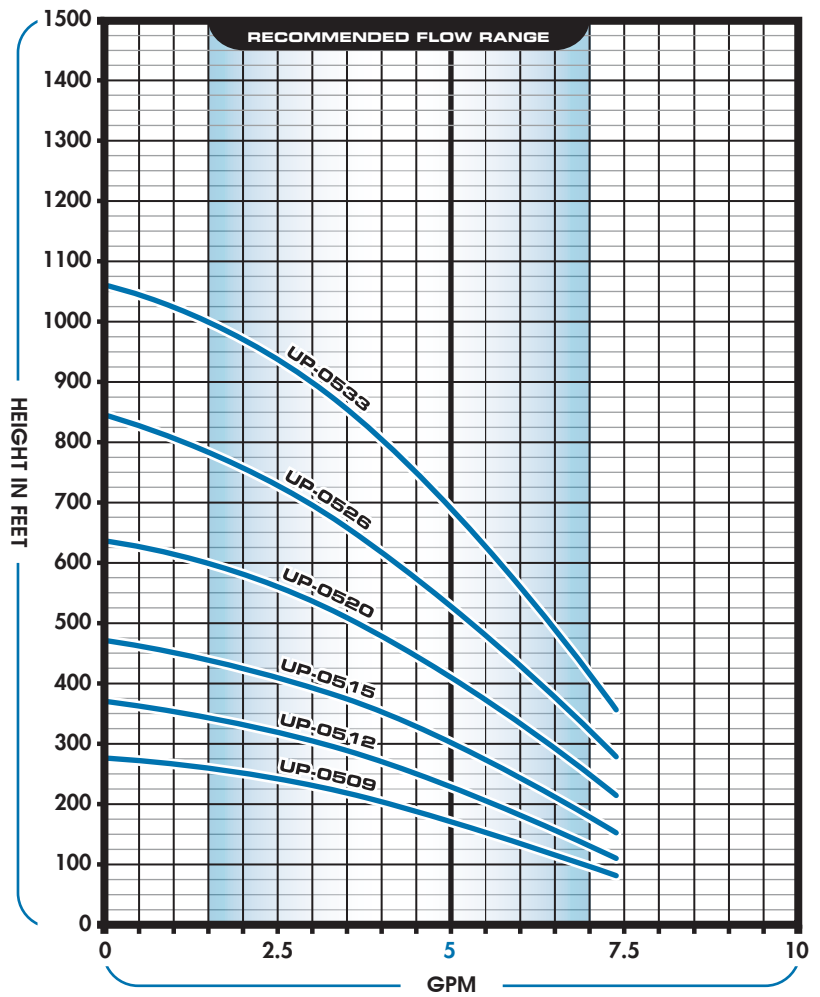

MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-0509	0.5	9	12.0	6.8
UP-0512	0.5	12	14.1	7.9
UP-0515	0.75	15	16.2	9.0
UP-0520	1	20	19.6	10.8
UP-0526	1.5	26	25.3	12.8
UP-0533	2	33	29.8	16.0




4" MODEL UP-07
60 Hz - 3450 RPM



1 1/4" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
7 GPM MAXIMUM EFFICIENCY

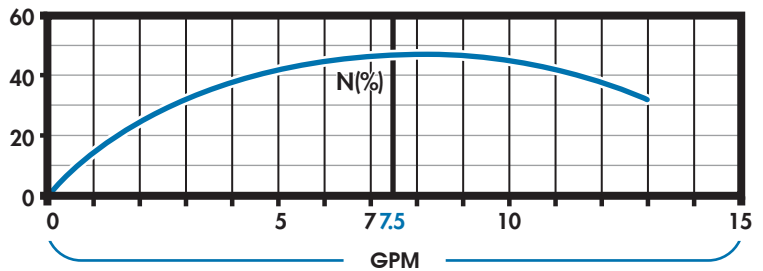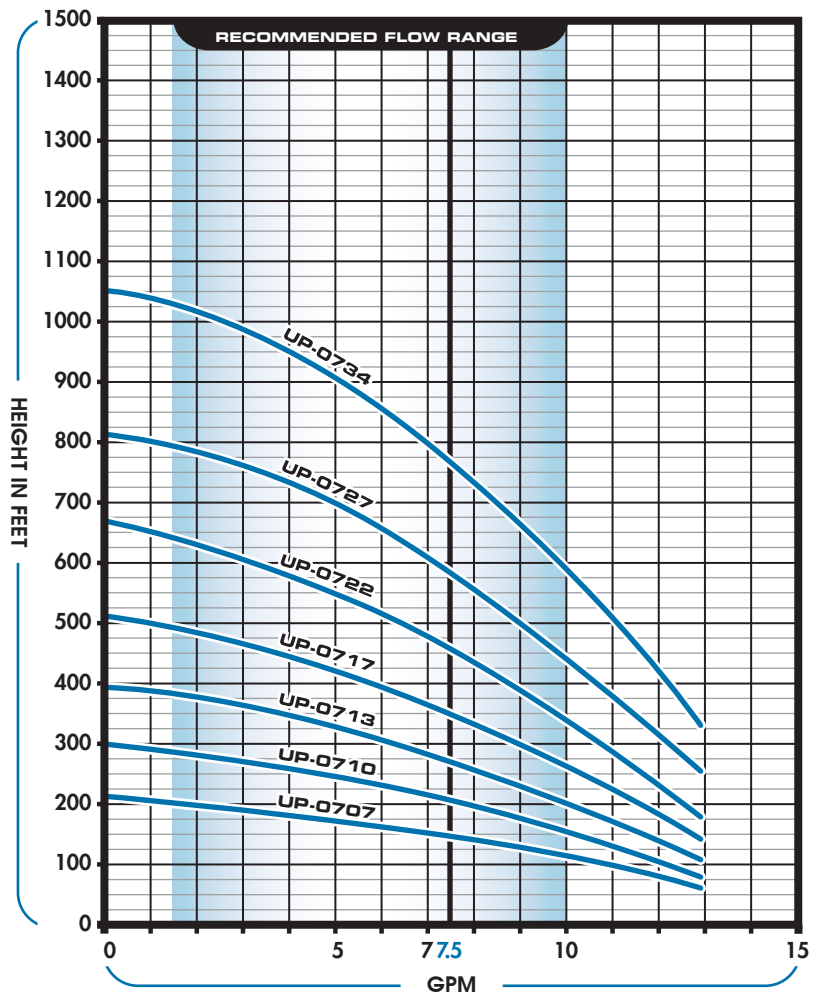


MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-0707	0.5	7	10.8	6.2
UP-0710	0.5	10	13.4	7.2
UP-0713	0.75	13	15.6	9.1
UP-0717	1	17	18.4	10.2
UP-0722	1.5	22	22	12.3
UP-0727	2	27	26.5	15.2
UP-0734	3	34	31.7	18.1




4" MODEL UP-10
60 Hz - 3450 RPM



1 1/4" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
10 GPM MAXIMUM EFFICIENCY

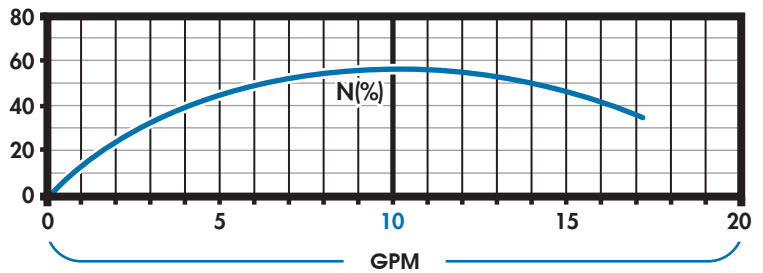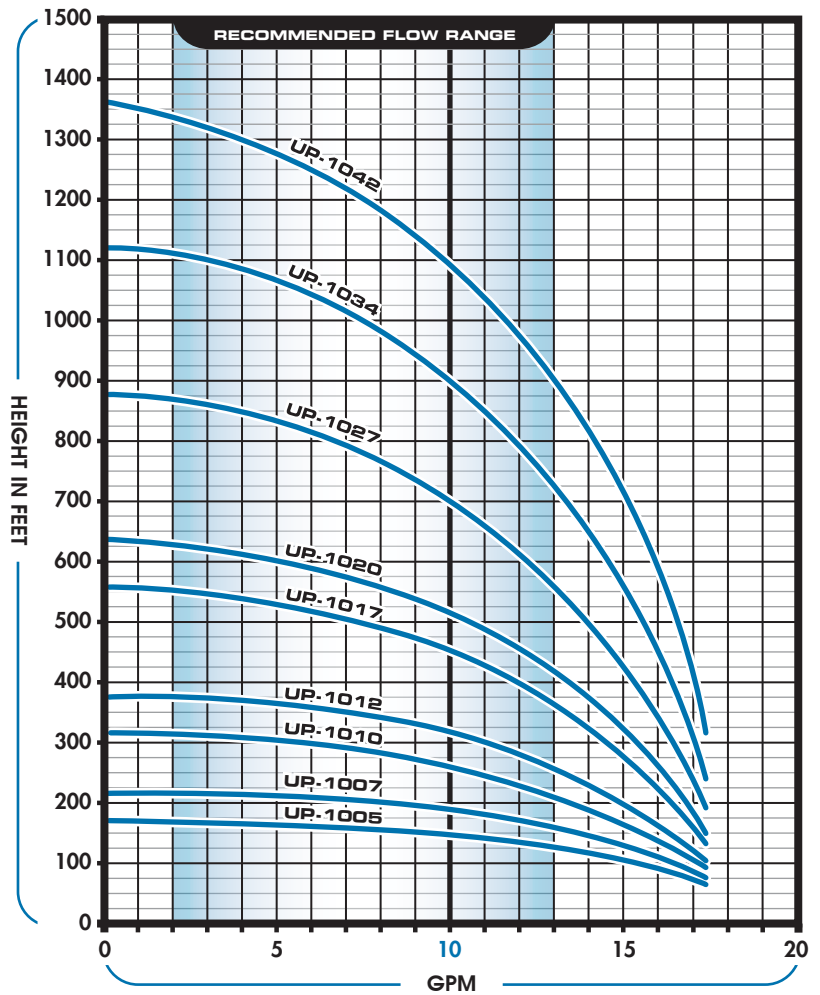


MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-1005	0.5	5	9.4	5.6
UP-1007	0.5	7	10.7	6.2
UP-1010	0.75	10	12.8	7.3
UP-1012	1	12	14.1	7.9
UP-1017	1.5	17	17.6	9.7
UP-1020	2	20	19.6	10.8
UP-1027	3	27	26.0	13.2
UP-1034	5	34	29.9	16.6
UP-1042	5	42	36.0	19.4



4" MODEL UP-13
60 Hz - 3450 RPM



1 1/4" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
13 GPM MAXIMUM EFFICIENCY

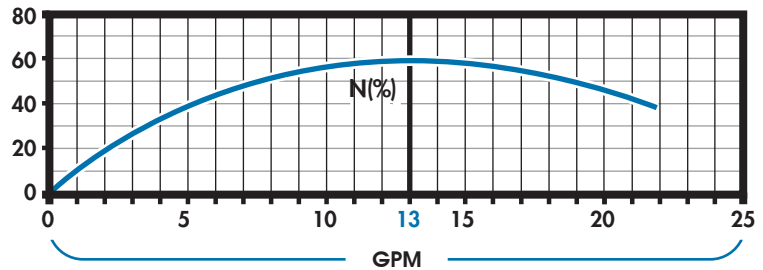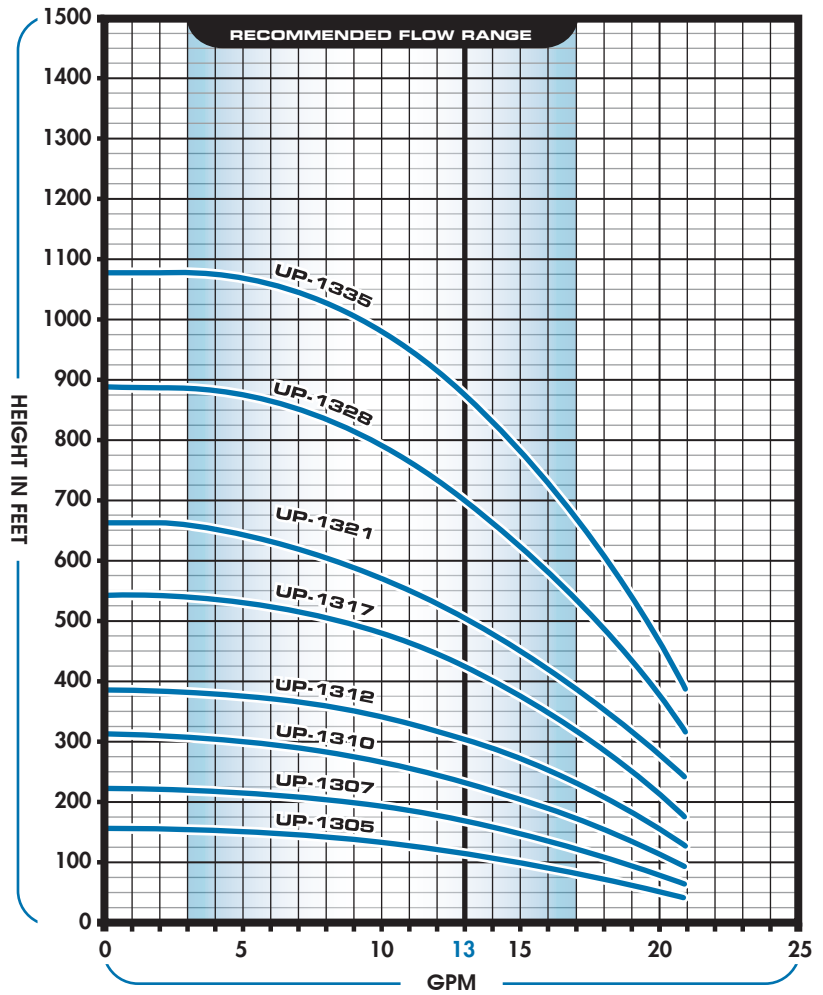

MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-1305	0.5	5	9.3	5.5
UP-1307	0.75	7	10.7	6.2
UP-1310	1	10	12.8	7.0
UP-1312	1.5	12	14.1	7.7
UP-1317	2	17	17.6	9.5
UP-1321	3	21	20.4	11.0
UP-1328	5	28	26.8	13.2
UP-1335	5	35	31.6	16.7




4" MODEL UP-18
60 Hz - 3450 RPM



1 1/4" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
18 GPM MAXIMUM EFFICIENCY

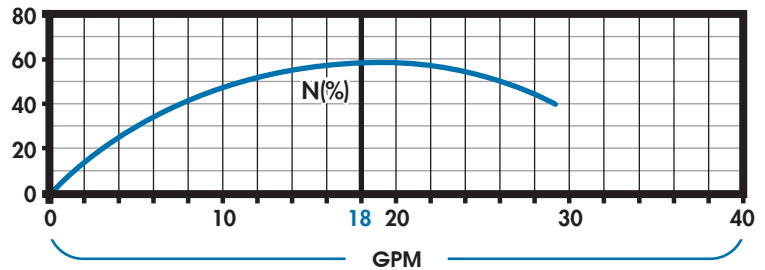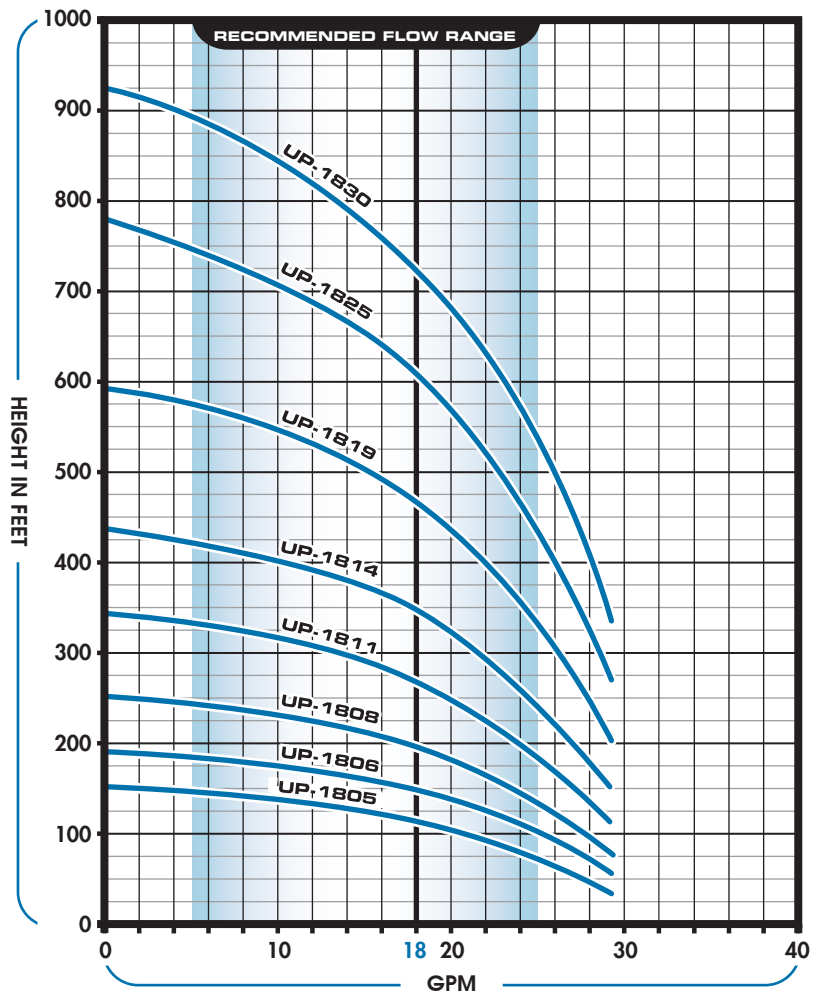

MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-1805	0.5	5	10.1	6.0
UP-1806	0.75	6	11.0	6.2
UP-1808	1	8	12.7	6.8
UP-1811	1.5	11	15.2	7.9
UP-1814	2	14	17.8	9.0
UP-1819	3	19	22.0	10.8
UP-1825	5	25	28.5	13.3
UP-1830	5	30	32.6	15.6




4" MODEL UP-25
60 Hz - 3450 RPM



1 1/2" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
25 GPM MAXIMUM EFFICIENCY

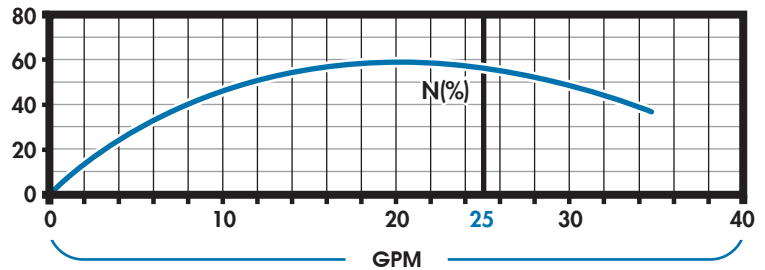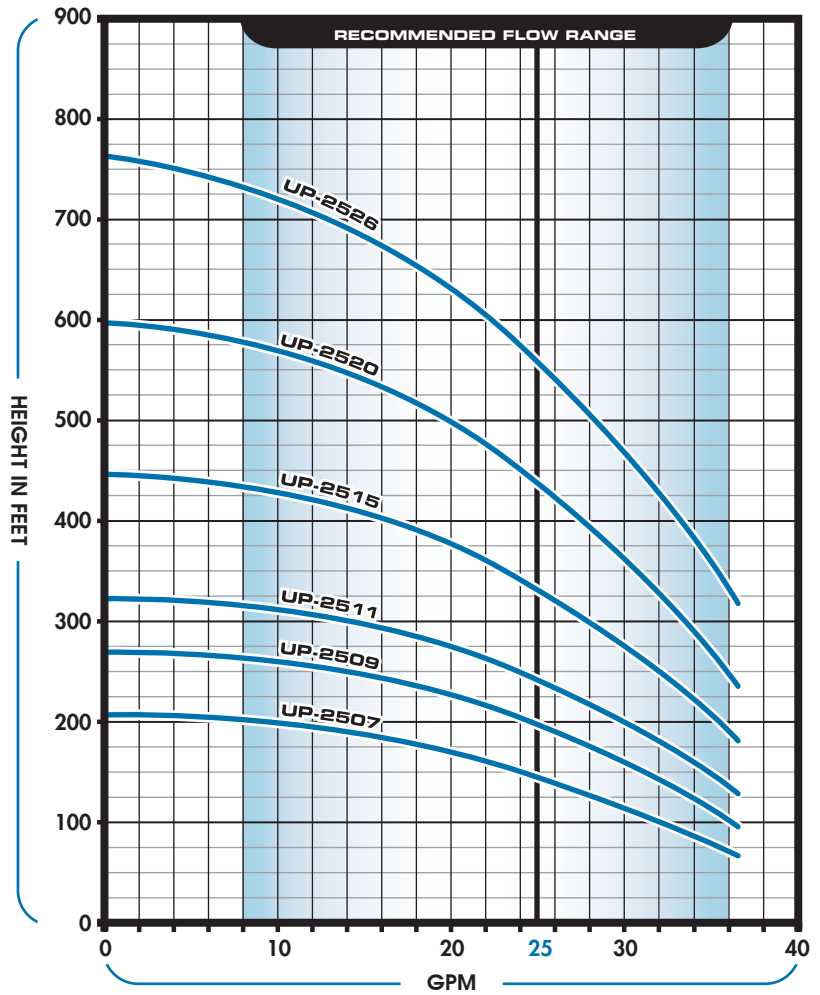

MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-2507	1	7	12.6	6.9
UP-2509	1.5	9	14.6	7.7
UP-2511	2	11	16.5	8.6
UP-2515	3	15	20.4	10.3
UP-2520	5	20	26.8	12.8
UP-2526	5	26	32.5	15.6



4" MODEL UP-35
60 Hz - 3450 RPM



2" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
35 GPM MAXIMUM EFFICIENCY

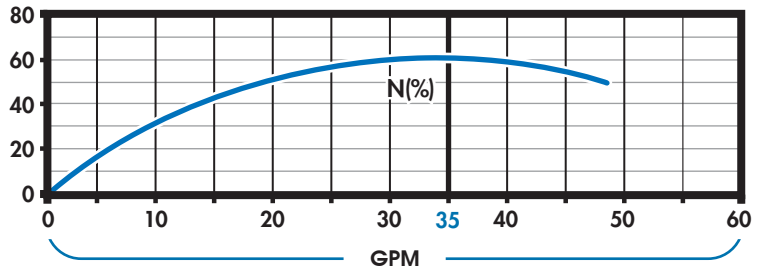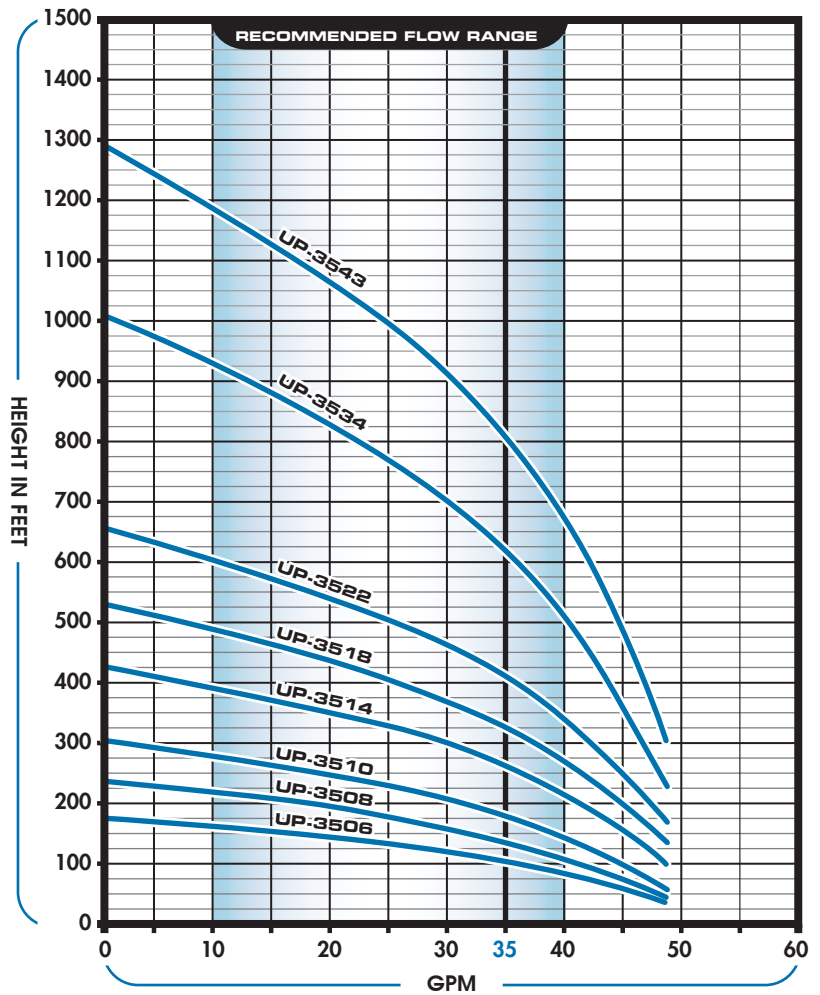

MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-3506	1	6	14.1	7.5
UP-3508	1.5	8	16.6	8.8
UP-3510	2	10	19.0	10.1
UP-3514	3	14	23.9	12.5
UP-3518	5	18	28.9	15.3
UP-3522	5	22	35.2	17.8
UP-3534	7.5	34	49.5	25.5
UP-3543	10	43	51.9	31.2




4" MODEL UP-55
60 Hz - 3450 RPM



2" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
55 GPM MAXIMUM EFFICIENCY

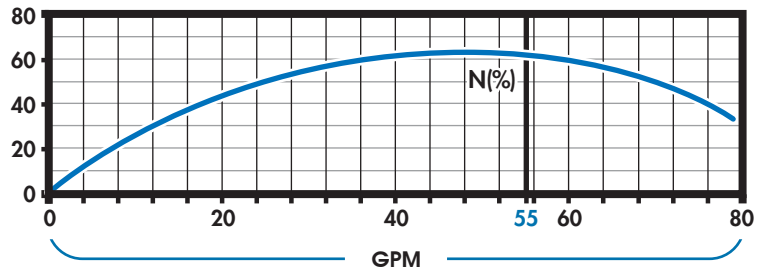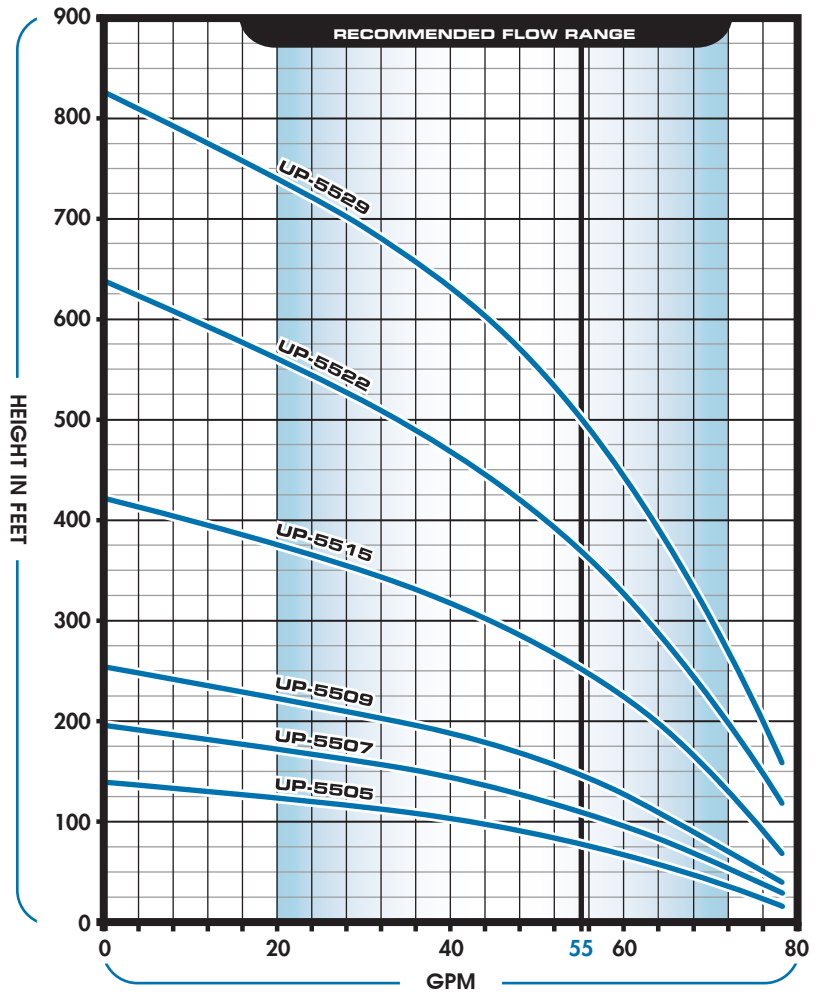

MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-5505	1.5	5	17.0	9.5
UP-5507	2	7	21.1	11.7
UP-5509	3	9	25.2	13.6
UP-5515	5	15	37.5	19.5
UP-5522	7.5	22	53.0	27.0
UP-5529	10	29	67.2	34.3




4" MODEL UP-80
60 Hz - 3450 RPM



2" Discharge



S.S. Cast Discharge Head





S.S. Cast Adapter



S.S. Bowl

UP SERIES PERFORMANCE CURVES
80 GPM MAXIMUM EFFICIENCY

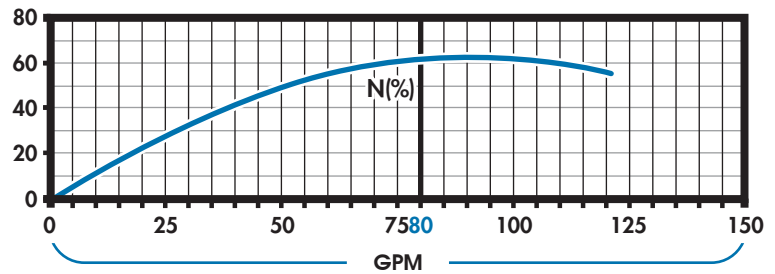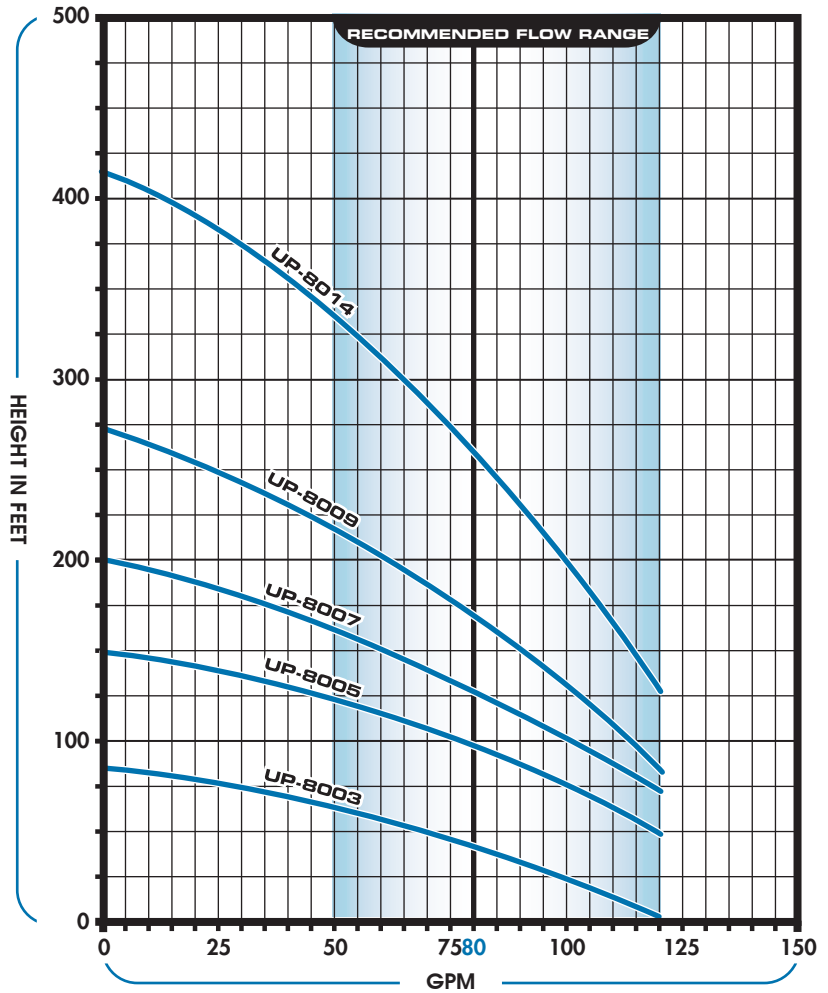

MODEL	HP	STAGES	LENGTH (in)	WEIGHT (lbs)
UP-8003	2	3	13	7.4
UP-8005	3	5	18.6	9.7
UP-8007	5	7	24.2	13.0
UP-8009	5	9	29.3	15.2
UP-8014	7.5	14	42.6	21.8